

HIGH FREQUENCY PLANAR TRANSFORMERS

Ruggedized



PL102XX Series

- ⊗ Power Rating: up to 250W
- ⊗ Height: 9.1mm to 10.4mm max
- ⊗ Footprint: 29.5mm x 26.7mm Max
- ⊗ Frequency Range: 200kHz to 700kHz
- ⊗ Isolation (Primary to Secondary): 1750V_{DC}

Electrical Specifications @ 25 °C – Operating Temperature – 40 °C to +130 °C


| Part Number | Turns Ratio | | Schematic | Primary* Inductance (μH MIN) | Leakage** Inductance (μH MAX) | DCR (mΩ MAX) | | | | Height (mm) |
|---|--------------------|---------------------|-----------|------------------------------|-------------------------------|--------------|-----------|--------------|-------------|-------------|
| | Primary | Secondary | | | | Primary A | Primary B | Primary Aux. | Secondary | |
| DOUBLE INTERLEAVE DESIGNS (HIGHER EFFICIENCY, LOWER DCR AND LOWER LEAKAGE) | | | | | | | | | | |
| PL10201 | 4T & 4T | 4T (1T:1T:1T:1T) | A1 | 216 | 0.3 | 13 | 13 | — | 4.5 | 10.2 |
| PL10203 | 5T & 5T (w/5T aux) | | | 340 | 0.3 | 15 | 15 | 235 | | |
| PL10205 | 6T & 6T (w/2T aux) | | | 480 | 0.3 | 21 | 21 | 78 | | |
| PL10207 | 7T & 7T (w/3T aux) | | | 660 | 0.3 | 50 | 50 | 100 | | |
| PL10209 | 8T & 8T | | | 860 | 0.3 | 60 | 60 | — | | |
| PL10208 | 4T & 4T | 1T & 1T | A2 | 216 | 0.3 | 13 | 13 | — | 0.56 & 0.56 | 10.2 |
| PL10210 | 5T & 5T (w/5T aux) | | | 340 | 0.3 | 15 | 15 | 235 | | |
| PL10212 | 6T & 6T (w/2T aux) | | | 480 | 0.3 | 21 | 21 | 78 | | |
| PL10214 | 7T & 7T (w/3T aux) | | | 660 | 0.3 | 50 | 50 | 100 | | |
| PL10216 | 8T & 8T | | | 860 | 0.3 | 60 | 60 | — | | |
| SINGLE INTERLEAVE DESIGNS | | | | | | | | | | |
| PL10230 | 4T | 4T (1T:1T:1T:1T) | B1 | 54 | 0.3 | 13 | — | — | 4.5 | 9.1 |
| PL10231 | 5T (w/5T aux) | | | 85 | 0.3 | 15 | — | 470 | | |
| PL10232 | 6T (w/2T aux) | | | 120 | 0.3 | 21 | — | 156 | | |
| PL10233 | 7T (w/3T aux) | | | 165 | 0.3 | 50 | — | 200 | | |
| PL10246 | 8T | | | 215 | 0.3 | 60 | — | — | | |
| PL10234 | 4T | 7T & 7T | B2 | 54 | 0.3 | 13 | — | — | 40 & 40 | 9.1 |
| PL10235 | 5T (w/5T aux) | | | 85 | 0.3 | 15 | — | 470 | | |
| PL10236 | 6T (w/2T aux) | | | 120 | 0.3 | 21 | — | 156 | | |
| PL10237 | 7T (w/3T aux) | | | 165 | 0.3 | 50 | — | 200 | | |
| PL10247 | 8T | | | 215 | 0.3 | 60 | — | — | | |
| PL10238 | 4T | 1T & 1T | B2 | 54 | 0.3 | 13 | — | — | 1.12 & 1.12 | 9.1 |
| PL10239 | 5T (w/5T aux) | | | 85 | 0.3 | 15 | — | 470 | | |
| PL10240 | 6T (w/2T aux) | | | 120 | 0.3 | 21 | — | 156 | | |
| PL10241 | 7T (w/3T aux) | | | 165 | 0.3 | 50 | — | 200 | | |
| PL10248 | 8T | | | 215 | 0.3 | 60 | — | — | | |
| PL10242 | 4T | 2T & 1T | B3 | 54 | 0.3 | 13 | — | — | 1.8 & 0.6 | 9.1 |
| PL10243 | 5T (w/5T aux) | | | 85 | 0.3 | 15 | — | 470 | | |
| PL10244 | 6T (w/2T aux) | | | 120 | 0.3 | 21 | — | 156 | | |
| PL10245 | 7T (w/3T aux) | | | 165 | 0.3 | 50 | — | 200 | | |
| PL10249 | 8T | | | 215 | 0.3 | 60 | — | — | | |

- Notes:
1. Parts can be ordered Non-Lead by adding "NL" to the part number (i.e. **PL10247NL**)
 2. Option Tape & Reel packaging can be ordered by adding a "T" suffix at the end of the part number (i.e. **PL10235T**)




Mechanicals

NOTE: The below is a universal footprint for a component that has all 11 pins populated. For a given part number it is only necessary to provide pads for the terminations shown

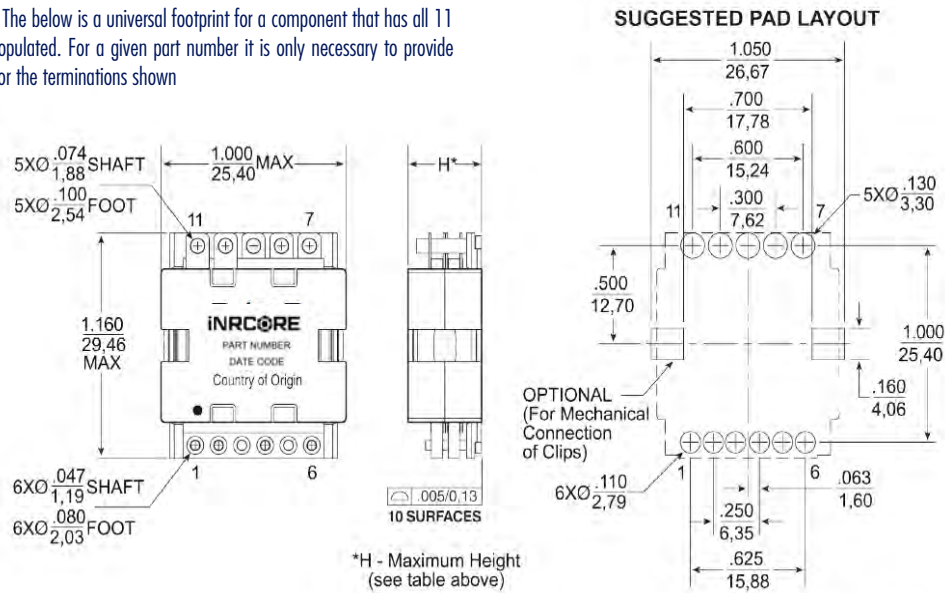

Electrical Schematics

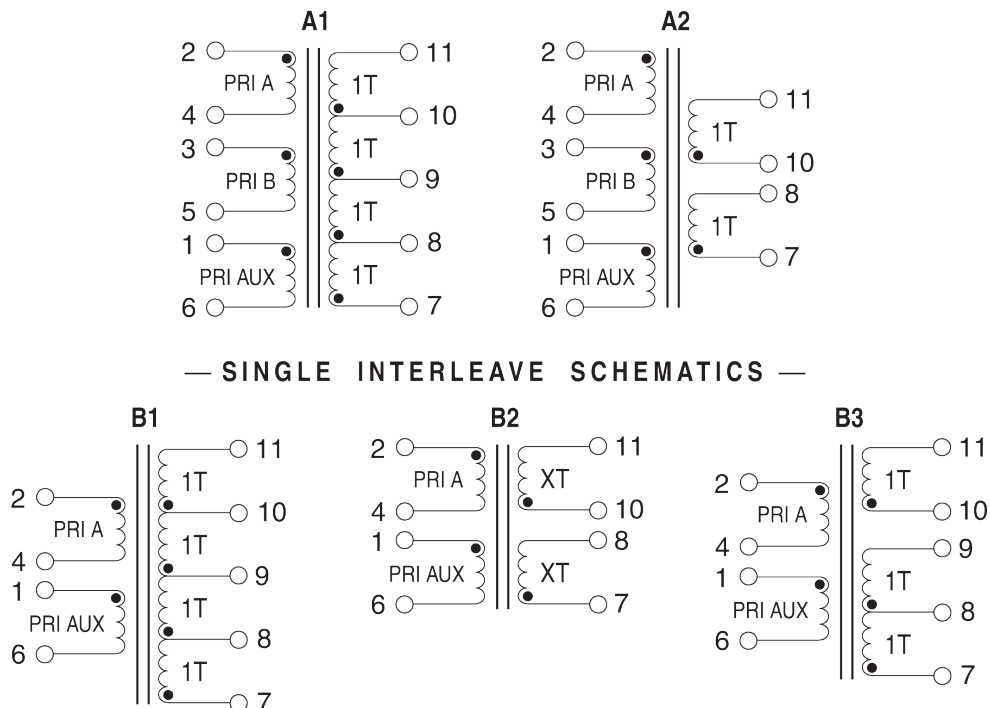

PL102XX Series

PL102XX Transformer Winding Configuration Matrix

The following is a matrix of the winding configurations that are possible with the iNRCORE PL102XX Planar Transformer Platform. The package is typically capable of handling between 150-250W of power depending on the application, ambient conditions and available cooling.

Once a configuration is selected, the formulae and charts can be used to determine the approximate power dissipation and temperature rise of the component in a given application.

High Efficiency Double Interleaved Designs

| | | SECONDARY WINDINGS | | | | | | | | |
|------------------|----------------|--------------------|---------|---------|----------------|---------|---------|--------------|---------|---------|
| | | Single Winding | | | Tapped Winding | | | Dual Winding | | |
| | | Turns | 1T | 2T | 4T | 1:1 | 1:3 | 2:2 | 1T & 1T | |
| | | DCR (mΩ) | 0.28 | 1.12 | 4.5 | 1.12 | 4.5 | 4.5 | 1.12 | |
| PRIMARY WINDINGS | Single Winding | 4T | 5 | PL10208 | PL10208 | PL10201 | PL10208 | PL10201 | PL10201 | PL10208 |
| | | 5T | 7.5 | PL10210 | PL10210 | PL10203 | PL10210 | PL10203 | PL10203 | PL10210 |
| | | 6T | 12 | PL10212 | PL10212 | PL10205 | PL10212 | PL10205 | PL10205 | PL10212 |
| | | 7T | 30 | PL10214 | PL10214 | PL10207 | PL10214 | PL10207 | PL10207 | PL10214 |
| | | 8T | 20 | PL10208 | PL10208 | PL10201 | PL10208 | PL10201 | PL10201 | PL10208 |
| | | 10T | 30 | PL10210 | PL10210 | PL10203 | PL10210 | PL10203 | PL10203 | PL10210 |
| | | 12T | 48 | PL10212 | PL10212 | PL10205 | PL10212 | PL10205 | PL10205 | PL10212 |
| | | 14T | 120 | PL10214 | PL10214 | PL10207 | PL10214 | PL10207 | PL10207 | PL10214 |
| | 16T | 140 | PL10216 | PL10216 | PL10209 | PL10216 | PL10209 | PL10209 | PL10216 | |
| | Dual Winding | 4T & 4T | 20 | PL10208 | PL10208 | PL10201 | PL10208 | PL10201 | PL10201 | PL10208 |
| 5T & 5T | | 30 | PL10210 | PL10210 | PL10203 | PL10210 | PL10203 | PL10203 | PL10210 | |
| 6T & 6T | | 48 | PL10212 | PL10212 | PL10205 | PL10212 | PL10205 | PL10205 | PL10212 | |
| 7T & 7T | | 120 | PL10214 | PL10214 | PL10207 | PL10214 | PL10207 | PL10207 | PL10214 | |
| 8T & 8T | | 140 | PL10216 | PL10216 | PL10209 | PL10216 | PL10209 | PL10209 | PL10216 | |

Lower Cost Single Interleaved Designs

| | | SECONDARY WINDINGS | | | | | | | | | | | | | | | |
|------------------|----------------|--------------------|------|---------|---------|---------|----------------|---------|---------|---------|---------|--------------|---------|---------|---------|---------|---------|
| | | Single Winding | | | | | Tapped Winding | | | | | Dual Winding | | | | | |
| | | Turns | 1T | 2T | 3T | 4T | 7T | 1:1 | 1:2 | 1:3 | 2:2 | 7:7 | 1T & 1T | 1T & 2T | 7T & 7T | | |
| | | DCR (mW) | 0.56 | 2.24 | 3.4 | 4.5 | 20 | 2.24 | 3.4 | 4.5 | 4.5 | 80 | 2.24 | 4.5 | 80 | | |
| PRIMARY WINDINGS | Single Winding | 4T | 10 | PL10238 | PL10238 | PL10242 | PL10230 | PL10234 | PL10238 | PL10242 | PL10230 | PL10230 | PL10234 | PL10238 | PL10242 | PL10234 | |
| | | 5T | 15 | PL10239 | PL10239 | PL10243 | PL10231 | PL10235 | PL10239 | PL10243 | PL10231 | PL10231 | PL10235 | PL10239 | PL10243 | PL10235 | |
| | | 6T | 24 | PL10240 | PL10240 | PL10244 | PL10232 | PL10236 | PL10240 | PL10244 | PL10232 | PL10232 | PL10232 | PL10236 | PL10240 | PL10244 | PL10236 |
| | | 7T | 60 | PL10241 | PL10241 | PL10245 | PL10233 | PL10237 | PL10241 | PL10245 | PL10233 | PL10233 | PL10233 | PL10237 | PL10241 | PL10245 | PL10237 |
| | | 8T | 70 | PL10248 | PL10248 | PL10249 | PL10246 | PL10247 | PL10248 | PL10249 | PL10246 | PL10246 | PL10246 | PL10247 | PL10248 | PL10247 | PL10247 |

NOTES: 1. The base PN (ie: PL10201) uses an ungapped core. The minimum primary inductance for any configuration can be calculated as:

$$\text{Primary Inductance } (\mu\text{H Min}) = 3.4 * (\text{Primary Turns})^2$$

2. The above base part numbers (PL102XX) are available from stock

3. It is possible to add a small gap to the transformer. Gapped transformers are non-standard and can be made available upon request, but are not typically available from stock.

To request a gapped version of the transformer, add a suffix "G" to the base number (ie: **PL10201G**). The nominal inductance with a gap can be calculated as:



$$\text{Primary Inductance } (\mu\text{H Nominal}) = 2.2 * (\text{Primary Turns})^2$$



PL102XX Series

Notes from Tables

1. The above transformers have been tested and approved by iNRCORE's IC partners and are cited in the appropriate datasheet or evaluation board documentation at these companies. To determine which IC and IC companies are matched with the above transformers, please refer to the IC cross reference on the iNRCORE web page.
2. To determine if the transformer is suitable for your application, it is necessary to ensure that the temperature rise of the component (ambient plus temperature rise) does not exceed its operating temperature. To determine the approximate temperature rise of the transformer, refer to the graphs below.
3. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact iNRCORE for availability.

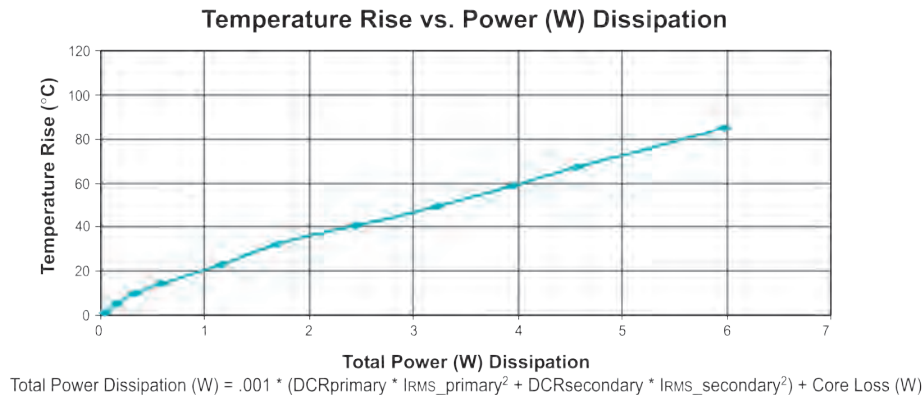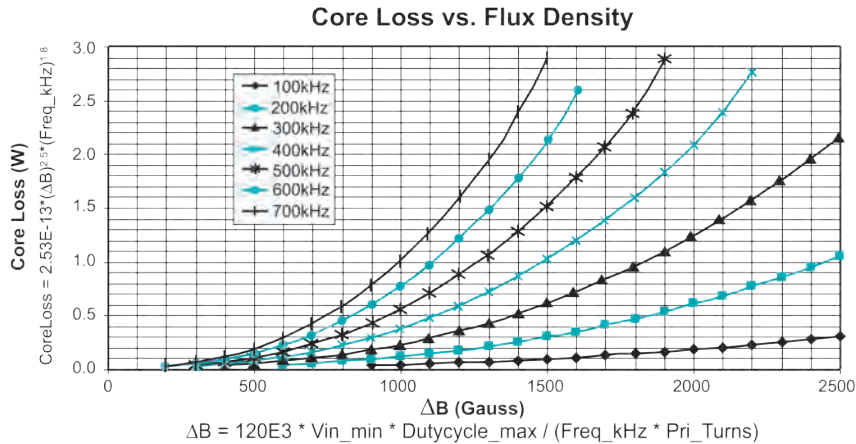

For More Information

iNRCORE, LLC
311 Sinclair Road Bristol,
PA 19007-6812 U.S.A
Tel: + 1.215.781.6400
Fax: +1.215.7816430

Global Sales Representatives and Locations:
<http://www.inrcore.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

