


10/100BASE-TX DUAL PORT TRANSFORMER MODULE

Ruggedized



- ⊗ Compliant with IEEE 802.3 standards
- ⊗ 350μH OCL with 8mA DC bias
- ⊗ Operating and Storage Temperature:
 - ⊗ 100B-2002F: -40°C to +85°C
 - ⊗ 100B-2002FX: -55°C to +125°C
- ⊗ Dielectric Withstanding Voltage (DWV): 1500 Vrms
- ⊗ Epoxy Encapsulated package withstands 235°C peak temperature profile
- ⊗ Lead Finish: Sn63Pb37
- ⊗ Moisture Sensitivity Level: 3

Electrical Specifications @ 25°C

Part Number	Insertion Loss (dB MAX)				Return Loss (dB MIN)						Crosstalk (dB MIN)				DM to CM Rejection Ratio (dB MIN)		
	0.10 MHz	30 MHz	60 MHz	100 MHz	5 MHz	30 MHz	40 MHz	50 MHz	60 MHz	80 MHz	1 MHz	30 MHz	60 MHz	100 MHz	2 MHz	60 MHz	100 MHz
100B-2002F	1.2	1.2	1.2	1.2	18	18	16	15	12	12	50	43	37	33	43	37	33
100B-2002FX	1.2	1.2	1.2	1.2	18	18	16	15	12	12	50	43	37	33	43	37	33

NOTES:



1. Add suffix "NL" for RoHS compliant version; i.e. 100B-2002F becomes 100B-2002FNL. NL parts have 100% SN Lead Finish (MSL:3)
2. For Tape & Reel packaging, add "T" suffix at the end of the part number: i.e. 100B-2002FNLT.

Mechanicals

Electrical Schematics

100B-2002F/FX

Dimensions: inch [mm]
Tolerance (unless otherwise specified): ±0.010 [0.25]

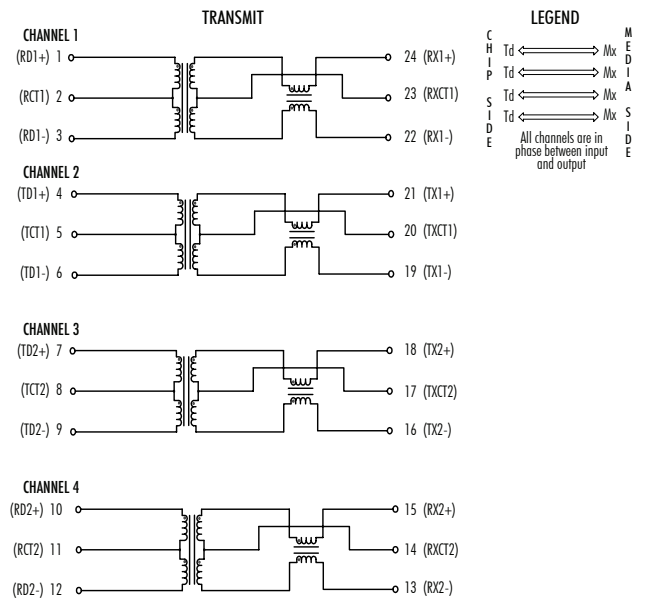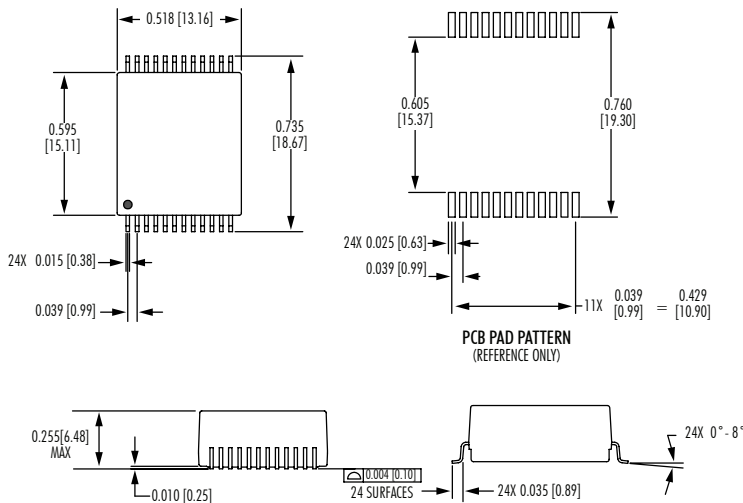

Weight: 3.0 grams
Tape and Reel: 300/reel
Tube: 25/tube



10/100BASE-TX DUAL PORT TRANSFORMER MODULE

Ruggedized

Recommended Reflow Profile (Based on J-STD-020D)



T_{SMIN} (°C)	T_{SMAX} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_p)	Ramp-down rate (T_p to T_L)	Time 25°C to peak temperature (s MAX)
100	150	183	235	60 - 120	60 - 150	20	3°C/s MAX	6°C/s MAX	360

NOTES:

1. All temperatures measured on the package leads.
2. Maximum number of reflow cycles not to exceed 2.

