


MIL-STD-1553 TRANSFORMERS

Low Profile THT Non-QPL Interface Transformers

Ruggedized



Summary Performance Specifications

Droop	20% MAX
Overshoot	±1V MAX
Common Mode Rejection (CMR)	45dB MIN
Frequency Range (no load)	75kHz - 1MHz
Operating Temperature Range (based on Prefix)	TLC 0°C to +70°C TLN -40°C to +85°C TL -55°C to +125°C
Weight	5 grams MAX
Insulation Resistance (MIN)	10K MΩ @ 250Vdc
Dielectric Withstanding Voltage	100Vrms

These Non-QPL interface transformers are built and tested in ISO 9001 approved facilities.

- ⊗ Dual ratio, single interface
- ⊗ Through-the-board package
- ⊗ Low profile, 0.155 inches height
- ⊗ Conform to all electrical and physical parameters of MIL-PRF-21038/27
- ⊗ Lead Finish: Sn63Pb37
- ⊗ Moisture Sensitivity Level: 1
- ⊗ Applicable Specifications:
 - ⊗ MIL-STD-1553B
 - ⊗ MIL-STD-202
 - ⊗ MIL-PRF-21038
 - ⊗ ISO 9001

Characteristics

Part Number	Terminals	Turns Ratio	RDC MAX	Impedance MIN
		(±3%)	(Ω)	(Ω)
(XXX)1553-1	1-3:4-8 1-3:5-7	1CT:1CT 1CT:0.707CT	1-3 = 3.0 4-8 = 3.0	(1-3) 4,000
(XXX)1553-2	1-3:4-8 1-3:5-7	1.40CT:1CT 2CT:1CT	1-3 = 3.5 4-8 = 3.0	(1-3) 7,200
(XXX)1553-3	1-3:4-8 1-3:5-7	1.25CT:1CT 1.66CT:1CT	1-3 = 3.2 4-8 = 3.0	(1-3) 4,000
(XXX)1553-5*	1-3:4-8 1-3:5-7	1CT:2.12CT 1CT:1.50CT	1-3 = 1.0 4-8 = 3.5	(4-8) 4,000
(XXX)1553-45*	1-3:4-8 1-3:5-7	1CT:2.50CT 1CT:1.79CT	1-3 = 1.0 4-8 = 3.5	(4-8) 4,000




NOTES:

1. Refer to the Summary Performance Specifications Table above to select the prefix for your desired Operating Temperature Range. Replace (XXX) from the part number in the table with the desired prefix: TLC, TLN, TL.

* Designed for transceivers utilizing a single supply voltage (+5V).

Mechanicals

Electrical Schematics

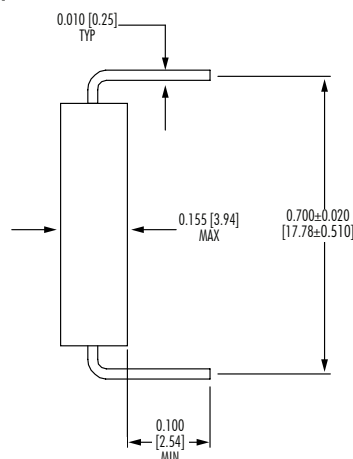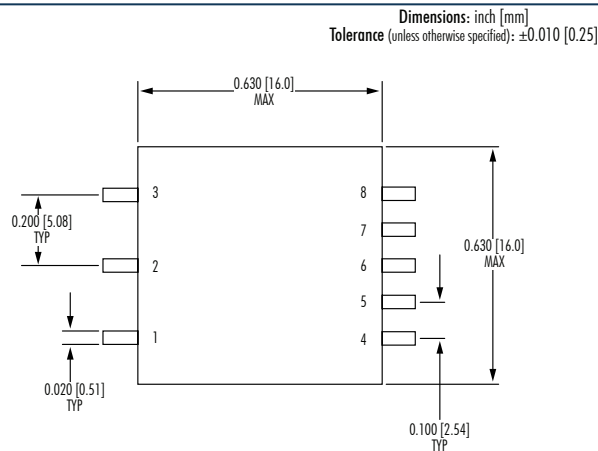

MIL-STD-1553 TRANSFORMERS

Low Profile THT Non-QPL Interface Transformers

Ruggedized

MIL-PRF-21038/27 Inspection, Sampling, Testing

Table 1 - Group A Inspection

Level "C" **		Level "M"		Level "T"	
Tests	Sampling Plan	Tests	Sampling Plan	Tests	Sampling Plan
N/A	N/A	Electrical Characteristics per MIL-PRF-21038/27	Sample per Table 3	Thermal Shock	100%
N/A	N/A	Visual & Mechanical Inspection	Sample per Table 3	Winding Continuity	100%
N/A	N/A	N/A	N/A	Electrical Characteristics per MIL-PRF-21038/27	100%
N/A	N/A	N/A	N/A	Impedance	Sample per Table 3
N/A	N/A	N/A	N/A	Visual & Mechanical Inspection	Sample per Table 3

Table 2 - Group B Inspection

Level "C" **		Level "M"		Level "T"	
Tests	Sampling Plan	Tests	Sampling Plan	Tests	Sampling Plan
N/A	N/A	Dielectric Withstanding Voltage	Sample per Table 3	Dielectric Withstanding Voltage	Sample per Table 3
N/A	N/A	Insulation Resistance	Sample per Table 3	Insulation Resistance	Sample per Table 3

Table 3 - Sampling Plans for Group A and Group B Inspections

Lot Size	Group A, Group II Inspections	Group B
1 to 5	All	All
6 to 13	All	5
14 to 50	13	5
51 to 90	13	7
91 to 150	13	11
151 to 280	20	13
281 to 500	29	16
501 to 1,200	34	19
1,201 to 3,200	42	23
3,201 to 10,000	50	29

** Parts ordered to Level C are certified to comply with MIL-PRF-21038 Level C, however testing is performed per manufacturer's internal requirements and sampling rates.



iNRCORE, LLC

311 Sinclair Road, Bristol, PA 19007-6812 USA

Tel: +1.215.781.6400 Fax: +1.215.781.6430

www.iNRCORE.com

M226.E (13AUG25)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2025. iNRCORE, LLC. All rights reserved.