## 10/100 BASE-T SINGLE PORT TRANSFORMER MODULE

Industrial Grade



- Compliant with IEEE 802.3 standards
- Low profile packages: 0.088" MAX for PC card and card bus applications
- 350µH OCL with 8mA D.C.bias at 100KHz, 100mV
- Dielectric Withstanding Voltage (DWV): 1500 Vrms
- Operating Temperature:  $-40^{\circ}$ C to  $+85^{\circ}$ C
- Lead Finish: Pure Tin
- Moisture Sensitivity Level: 1

Electrical Specifications @ 25°C														
	Insertion Loss				Return Loss				Crosstalk			DM to CM Rejection Ratio		
	(dB MAX)				(dB MIN)				(dB MIN)			(dB MIN)		
Part	0.10	30	60	100	5	30	60	80	30	60	80	30	60	100
Number	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz	MHz
R1035NL	1.2	1.2	1.2	1.2	16	16	14	10	45	40	35	35	30	25

12X 0.045 [1.14]

#### NOTES:

- 1. For Tape & Reel packaging, add "T" suffix at the end of the part number: i.e. R1035NLT.
- 2. Country of Origin: China

0.004 [0.10]


12 SURFACES

#### Dimensions: inch [mm] Tolerance (unless otherwise specified): ±0.010 [0.25] R1035NL **■**—0.510 [12.95] MAX- **4** 0.350 [8.89] **4 ←** 0.350 [8.89] **→** 0.050 [1.27] 12X 0.020 [0.51] 12X 0.030 [0.76] ППП 0.380 [9.65] 0.357 [9.07] PIN 1 \_ IDENTIFICATION SUGGESTED PAD LAYOUT 0.088 [2.24] MAX

- 0.002 [0.050] MIN

Mechanicals

#### **Electrical Schematics**






# 10/100 BASE-T SINGLE PORT TRANSFORMER MODULE





### Recommended Reflow Profile (Based on J-STD-020D)

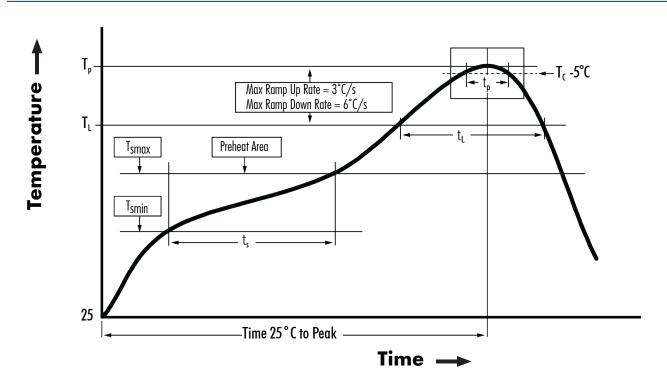

T <sub>smin</sub> (°C)	T <sub>smax</sub> (°C)	T <sub>L</sub> (°C)	T <sub>P</sub> (°C MAX)	† <sub>s</sub> (s)	t <sub>L</sub> (s)	t <sub>P</sub> (s MAX)	Ramp-up rate (T <sub>L</sub> to T <sub>P</sub> )	Ramp-down rate (T <sub>P</sub> to T <sub>L</sub> )	Time 25°C to peak temperature (s MAX)			
Non-Lead Profile												
150	200	217	245	60 - 120	60 - 150	30	3°C/s MAX	6°C/s MAX	480			

### NOTES:

- 1. All temperatures measured on the package leads.
- 2. Maximum number of reflow cycles not to exceed 2.

