

GENERAL PURPOSE TRANSFORMER

Ruggedized




- ⊗ High Dielectric Strength capability for industrial applications
- ⊗ Lead Finish: Sn63/Pb37

Electrical Specifications @ 25 °C – Operating Temperature – 0°C to +70 °C							
Part Number	Turns Ratio	Pri-Sec Insulation	Max (V*µsec)	Primary Inductance (µH MIN)	Leakage Inductance (µH Max)	DCR Primary (Ω MAX)	DCR Secondary (Ω MAX)
PL3002	1:1:1	1600 Vrms	866	5000	0.50	6	7.2


Mechanical

PL3002

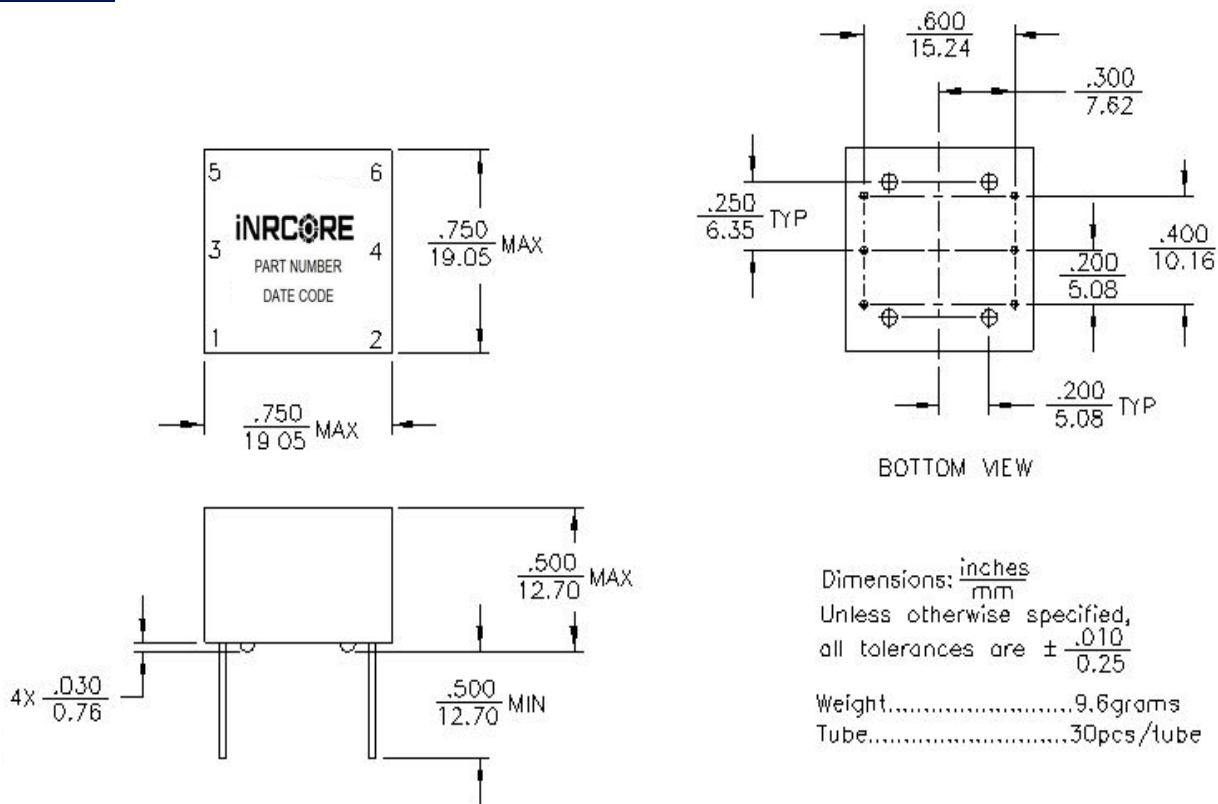

Electrical Schematic

PL3002

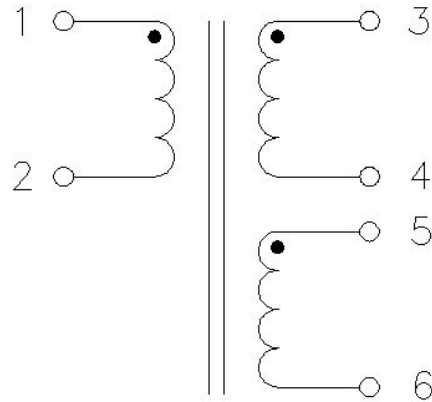

For More Information

iNRCORE, LLC
311 Sinclair Road Bristol,
PA 19007-6812 U.S.A
Tel: + 1.215.781.6400
Fax: +1.215.7816430

Global Sales Representatives and Locations:
<http://www.inrcore.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

