


MIL-STD-1553 TRANSFORMERS

SMT Single Transformer
Ruggedized



- ⊗ Single transformer package
- ⊗ Low Profile: 0.185" height
- ⊗ Storage Temperature: -55°C to +130°C
- ⊗ Max Reflow Temperature: 235°C
- ⊗ Weight: ≤3.0 grams
- ⊗ Moisture Sensitivity Level: 3




Electrical Specifications

Part Number	Terminals	Ratio	DC Resistance MAX	Impedance MIN	Droop MAX	Overshoot MAX	CMR MIN	Frequency Range (No Load)	IR @ 250Vdc MIN	DWV
		(±3%)	(W)	(W)	(%)	(V)	(dB)		(MW)	(Vrms)
SMG1553-60	1-3:4-8	1.25CT:1CT	(1-3) 2.4, (4-8) 2.2	(1-3) 4,000	20	±1	45	75kHz - 1MHz	10,000	100
SMG1553-61	1-3:5-7	1.66CT:1CT	(1-3) 2.4, (5-7) 1.5	(1-3) 4,000	20	±1	45	75kHz - 1MHz	10,000	100
SMG1553-65	1-3:4-8	1CT:2.50CT	(1-3) 1.0, (4-8) 2.6	(4-8) 4,000	20	±1	45	75kHz - 1MHz	10,000	100
SMG1553-66	1-3:5-7	1CT:1.79CT	(1-3) 1.3, (5-7) 2.6	(5-7) 4,000	20	±1	45	75kHz - 1MHz	10,000	100
SMG1553-67	1-3:5-7	1CT:2.70CT	(1-3) 0.50, (5-7) 2.5	(5-7) 4,000	20	±1	45	75kHz - 1MHz	10,000	100
SMG1553-68	1-3:4-8	1CT:3.75CT	(1-3) 0.40, (4-8) 2.5	(4-8) 4,000	20	±1	45	75kHz - 1MHz	10,000	100

Mechanicals

Electrical Schematics


SMG1553-6X

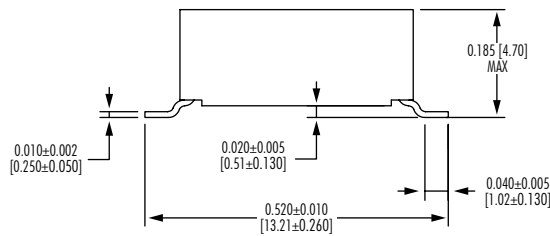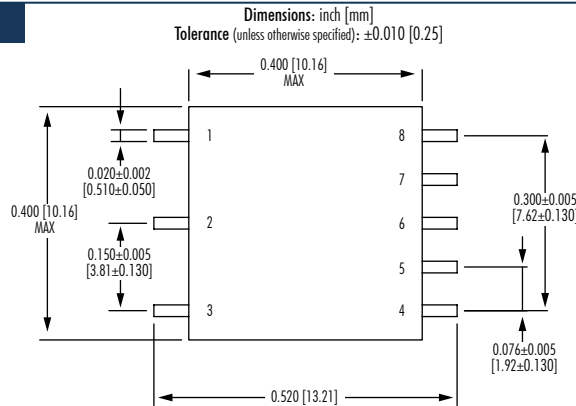

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

M112.D (10/21)

Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

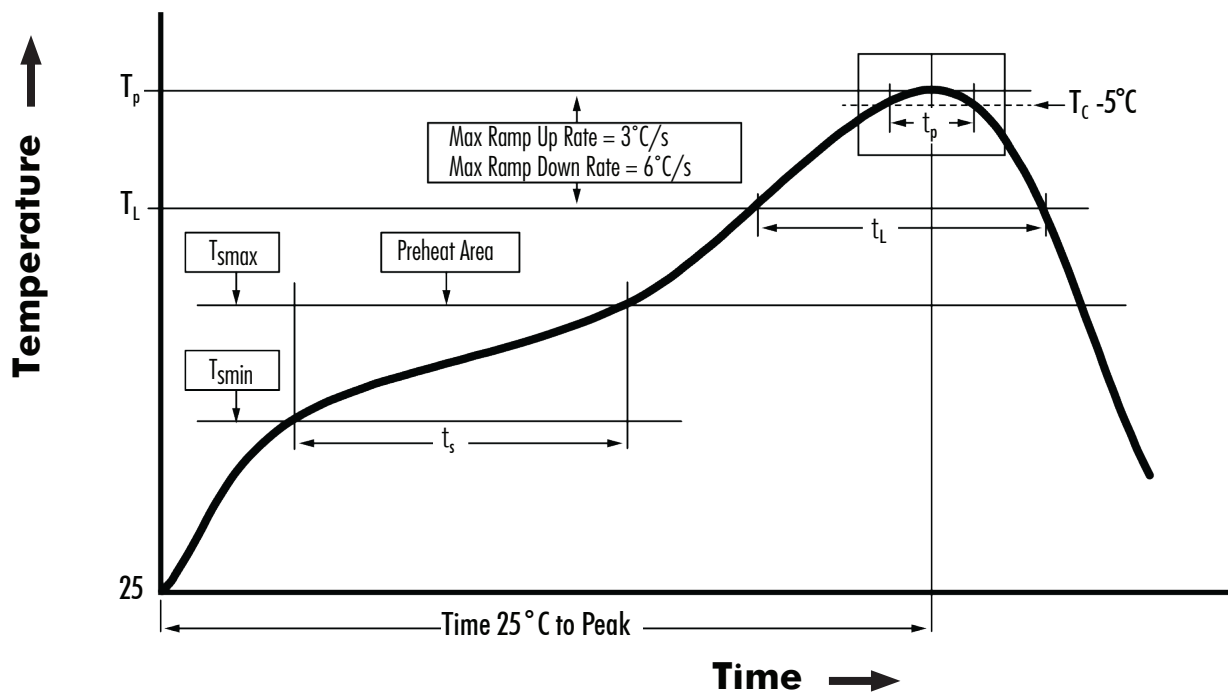

T_{SMIN} (°C)	T_{SMAX} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_P)	Ramp-down rate (T_P to T_L)	Time 25°C to peak temperature (s MAX)
100	150	183	225	60 - 120	60 - 150	20	3°C/s MAX	6°C/s MAX	360

NOTES:

1. All temperatures measured on the package leads.
2. Maximum times of reflow cycle: 2

