

GATE DRIVE TRANSFORMER

Ruggedized

PL3280



- ⊗ Surface Mount Package - Pick and Place Compatible
- ⊗ Ambient Operating Temperature: -55°C to +125°C
- ⊗ 1.4mm Creepage/Clearance Insulation
- ⊗ Storage Temperature: -55°C to +125°C
- ⊗ Epoxy Encapsulated
- ⊗ Isolation Voltage: 1500 Vrms Maximum
- ⊗ Moisture Sensitivity Level: 3 (168 hours floor life @ <30°C/60% RH)
- ⊗ Solder Reflow Processing: 235°C peak temperature, $\Delta T < 3^\circ\text{C}/\text{sec}$
- ⊗ Lead Finish: Hot Solder Dipped - Sn63%/Pb37%
- ⊗ Meets Environmental Requirements MIL-PRF-27F Grade 5 Class S
- ⊗ Operating Frequency: 50kHz and Up

Electrical Specifications 25°C

Part Number ^{3,4}	Turns Ratio	Pri-Sec Insulation	Max ¹ (V* μsec)	Primary Inductance (μH MIN)	Leakage ² Inductance	DCR Primary (Ω MAX)	DCR Secondary (Ω MAX)
PL3280	1:1:1	1000 Vdc	12.7	1140	0.65	0.75	0.75




Notes:

1. The maximum volt- μsec rating limits the peak flux density to 2200 Gauss when used in a unipolar drive application. For bi-polar drive applications a maximum volt- μsec of two times this rating is acceptable (ie: 2* (volt* μsec rating) Volt* μsec = (voltage applied to the primary) * dutycycle / Frequency = V * alpha / Freq_Hz = V * μsec .
2. Leakage inductance is measured at primary terminals with all secondaries shorted.
3. Optional Tape & Reel packaging can be ordered by adding a "T" suffix to the part number (i.e. PL3280 becomes PL3280T). Pulse complies to industry standard tape and reel specification EIA481.
4. The "NL" suffix indicates an RoHS-compliant part number. Non-NL suffixed parts are not necessarily RoHS compliant, but are electrically and mechanically equivalent to NL versions. If a part number does not have the "NL" suffix, but an RoHS compliant version is required, please contact Pulse for availability.
5. The temperature of the component (ambient plus temperature rise) must be within the stated operating temperature range.

Mechanical

Schematic


PL3280

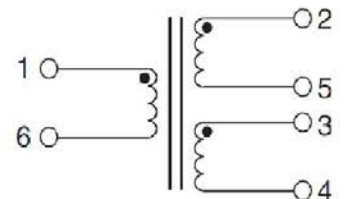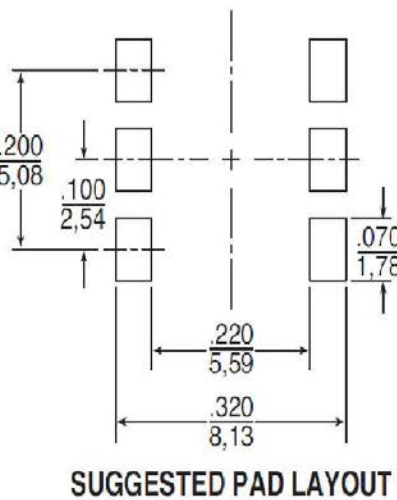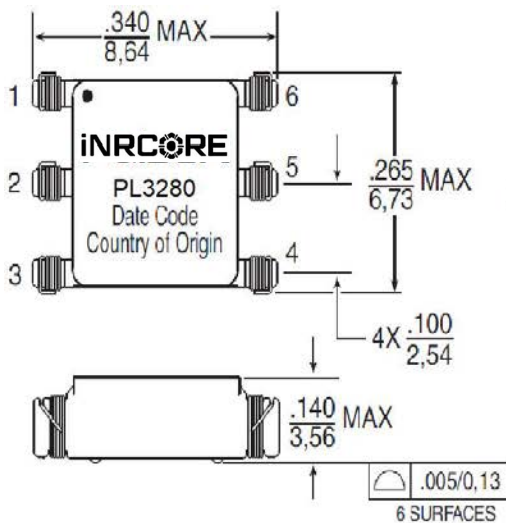

Weight..... 0.23 grams
Tape & Reel..... 800/reel
Tube..... 75/tube
Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm \frac{.010}{0,25}$



Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

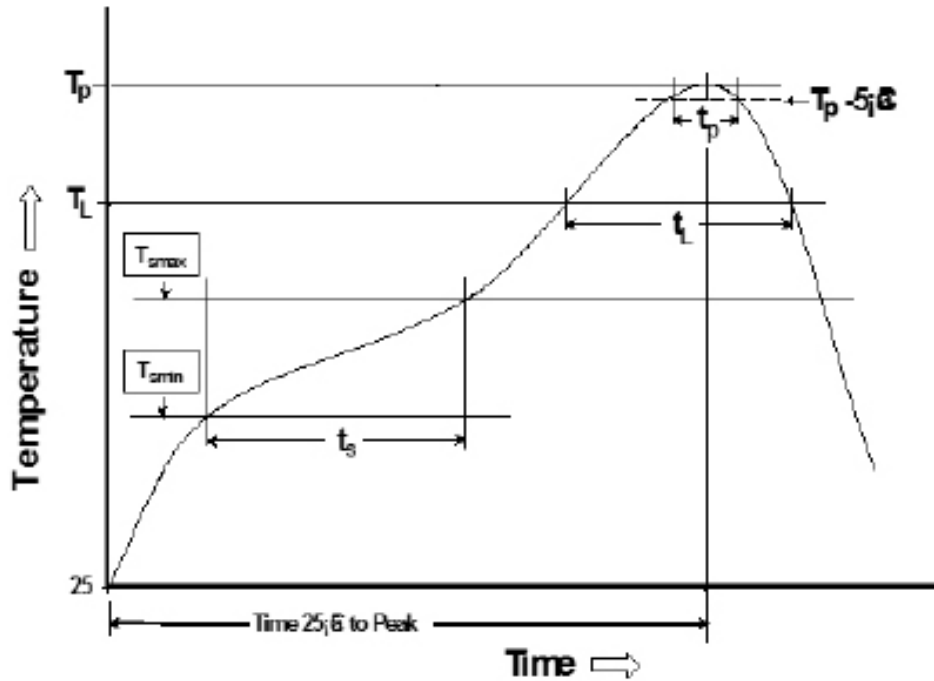

TSMIN (°C)	TSMAX (°C)	T _L (°C)	T _P (°C MAX)	t _S (s)	t _L (s)	t _P (s MAX)	Ramp-up rate (T _L to T _P)	Ramp-down rate (T _P to T _L)	Time 25°C to peak temperature (s MAX)
100	150	183	225	60-120	60-150	20	3°C/s MAX	6°C/s MAX	360

Notes:

1. All temperatures measured on the package leads.
2. Maximum times of reflow cycle: 2.

For More Information

iNRCORE, LLC
311 Sinclair Road Bristol,
PA 19007-6812 U.S.A
Tel: + 1.215.781.6400
Fax: +1.215.7816430

Global Sales Representatives and Locations:
<http://www.inrcore.com>

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

