

# COPPERHEAD™ HIGH SPEED DUAL TRANSFORMERS



Ruggedized



- Compliant with ANSI X3T11, Fiber Channel, FC-PH-3 for quarter/full speed applications, SMPTE, IEEE-1394 FireWire
- Dielectric Withstanding Voltage (DWW): 1500 Vrms
- Operating & Storage Temperature: -55°C to +125°C
- Lead Finish: Sn63/Pb37
- Moisture Sensitivity Level: 3

## Electrical Specifications @ 25°C

Part Number	Turns Ratio (±5%)	Primary Inductance 100kHz, 0.02Vrms (µH MIN)	Rise Time @ 20% to 80% (pS MAX)	DC Resistance (Ω MAX)	Insertion Loss 500 - 1600MHz (dB MAX)	Application Nominal Data Rate (Mbps)
T-3200SCT	1:1	0.70	200	0.20	4.5	3200 (SMPTE)

### NOTES:






- For Tape & Reel packaging, add "T" suffix at the end of the part number: i.e. T-3200SCTT

### Mechanicals

### Electrical Schematics


T-3200SCT

Dimensions: inch [mm]  
Tolerance (unless otherwise specified): ±0.010 [0.25]

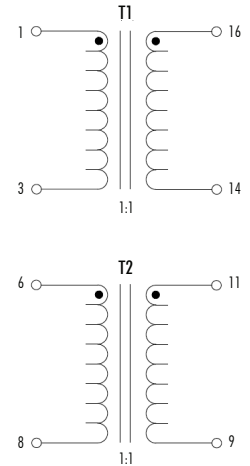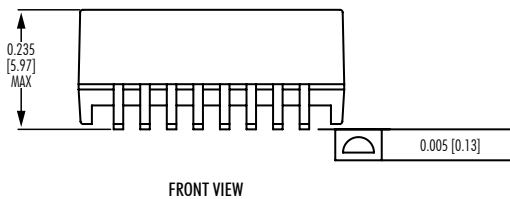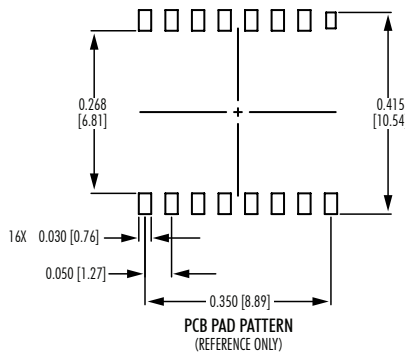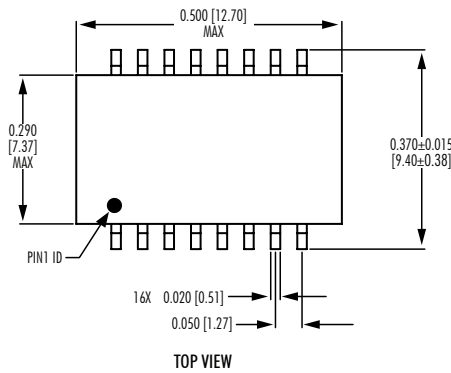

Ruggedized

## Tin/Lead Recommended Reflow Profile (Based on J-STD-020D)

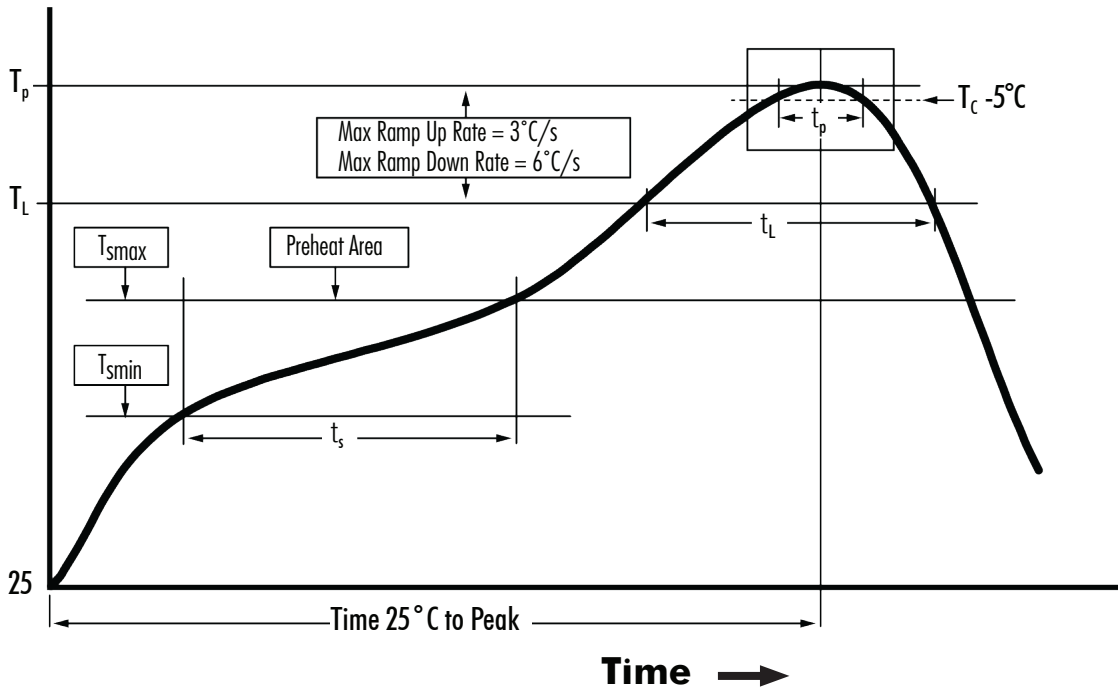

$T_{SMIN}$ (°C)	$T_{SMAX}$ (°C)	$T_L$ (°C)	$T_P$ (°C MAX)	$t_s$ (s)	$t_L$ (s)	$t_p$ (s MAX)	Ramp-up rate ( $T_L$ to $T_P$ )	Ramp-down rate ( $T_P$ to $T_L$ )	Time 25°C to peak temperature (s MAX)
100	150	183	235	60 - 180	60 - 150	20	3°C/s MAX	6°C/s MAX	360

**NOTES:**

1. All temperatures measured on the package leads.
2. Maximum number of reflow cycles not to exceed 2.



iNRCORE, LLC  
311 Sinclair Road, Bristol, PA 19007-6812 USA  
Tel: +1.215.781.6400 Fax: +1.215.781.6430

[www.iNRCORE.com](http://www.iNRCORE.com)

M643 (02FEB23)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.