

1000BASE - T SINGLE PORT TRANSFORMER MODULE

Ruggedized

- Compliant with IEEE 802.3 standards
- 350 μ H OCL with 8mA DC bias to 100KHz, 100mV
- Operating Temperature: -40°C to +85°C
- Storage Temperature: -55°C to +125°C
- Dielectric Withstanding Voltage (DWV): 1500 Vrms
- Lead Finish: Sn100
- Moisture Sensitivity Level: 1
- Low profile surface mount package, Open construction

Electrical Specifications @ 25°C

Part Number	Insertion Loss (dB MAX)				Return Loss (dB MIN)					Crosstalk (dB MIN)				DM to CM Rejection Ratio (dB MIN)				
	0.10 MHz	30 MHz	60 MHz	100 MHz	1 MHz	40 MHz	60 MHz	80 MHz	100 MHz	1 MHz	30 MHz	60 MHz	100 MHz	1 MHz	30 MHz	60 MHz	100 MHz	125 MHz
1000B-5032FNL	1.2	1.2	1.2	1.2	18	16	12	10	8	50	44	37	33	42	31	25	21	19

NOTES:






- For Tape & Reel packaging, add "T" suffix at the end of the part number: i.e. 1000B-5032FNLT

Mechanicals


Electrical Schematics

1000B-5032FNL

Dimensions: inch [mm]
Tolerance (unless otherwise specified): ± 0.010 [0.25]

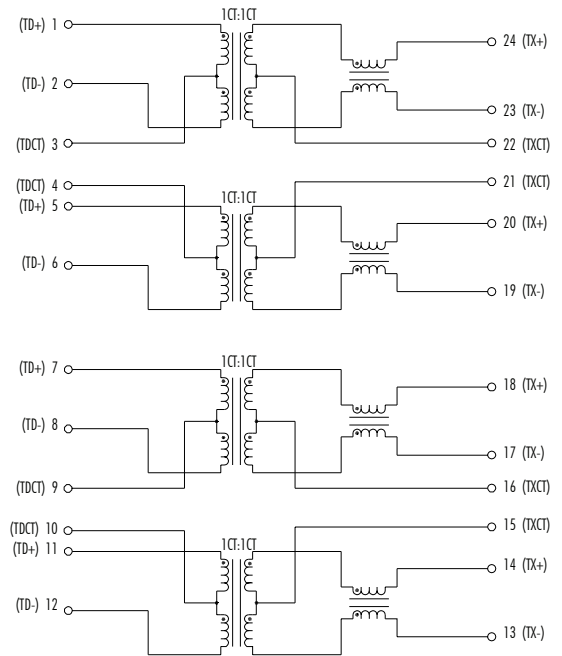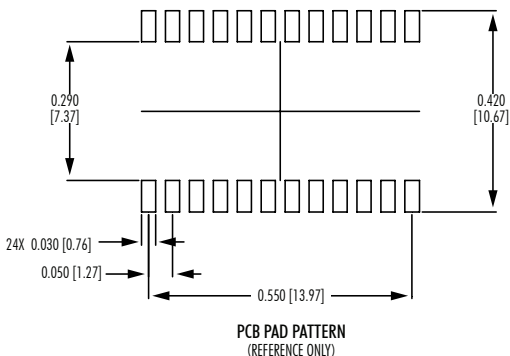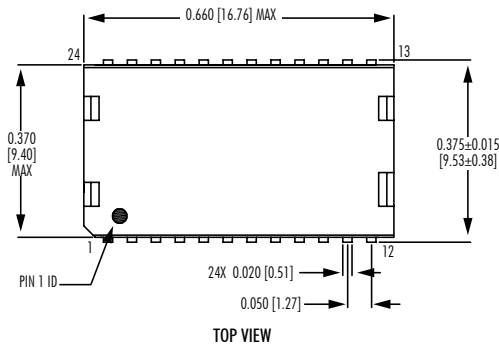


LEGEND



1000BASE - T SINGLE PORT
TRANSFORMER MODULE

Ruggedized

Recommended Reflow Profile (Based on J-STD-020D)

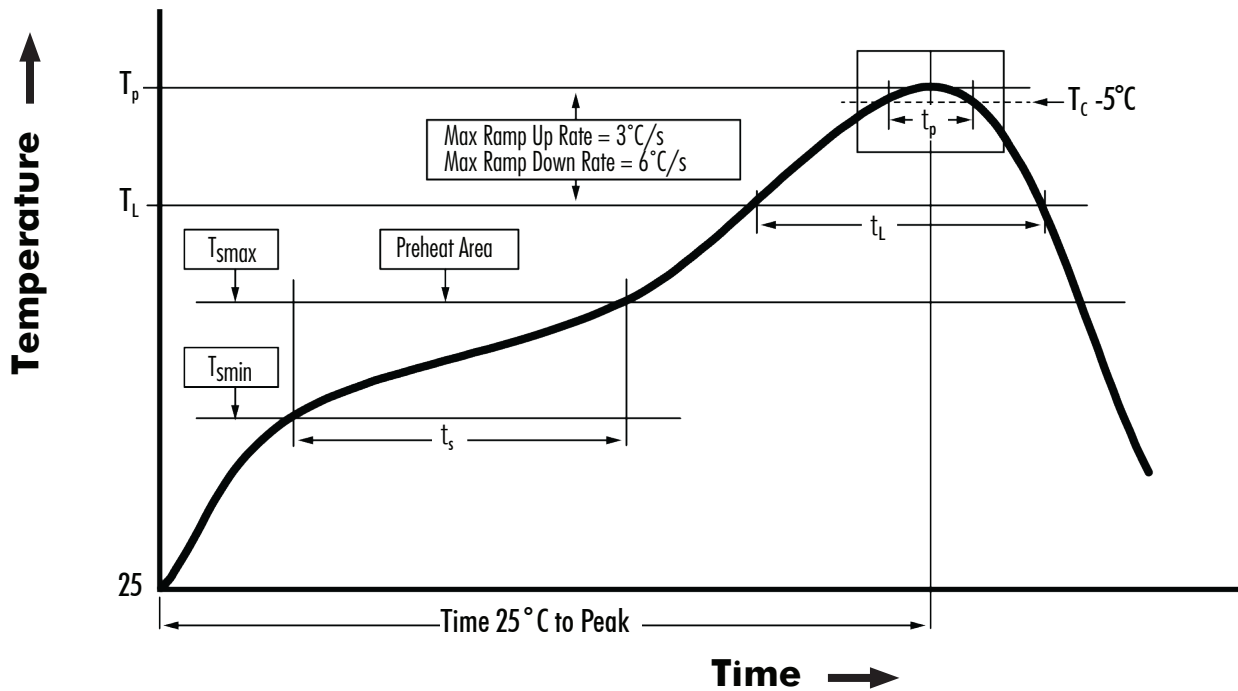

T_{Smin} (°C)	T_{Smax} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_P)	Ramp-down rate (T_P to T_L)	Time 25°C to peak temperature (s MAX)
150	200	217	245	60 - 120	60 - 150	30	3°C/s MAX	6°C/s MAX	480

- NOTES:
- 1. All temperatures measured on the package leads.
 - 2. Maximum number of reflow cycles not to exceed 2.



iNRCORE, LLC
311 Sinclair Road, Bristol, PA 19007-6812 USA
Tel: +1.215.781.6400 Fax: +1.215.781.6430

www.iNRCORE.com

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2020. iNRCORE, LLC. All rights reserved.

M385.A (29MAR23)